

# VOLKSWAGEN

AKTIENGESELLSCHAFT



## Operating manual

Diagnostic cable VAS 5581/15



Revision	Date	Reason
V00	20.05.2021	First edition
V01	17.12.2021	Transfer to Stodia
V02	24.01.2024	Updating of certificate: China RoHS

## Legal notice

**Manufacturer** STODIA GmbH  
Battery & Diagnostics Technology  
Im Freitagsmoor 45  
38518 Gifhorn, Germany  
Phone: +49 (0) 5371 / 945 93 96-0  
info@stodia.de  
www.stodia.de

**Reproduction** Reproduction or reprinting, whether in whole or in part, always requires the written permission of the manufacturer.

**Copyright** TRANSLATION OF THE ORIGINAL OPERATING MANUAL  
All rights reserved.  
All text, images and graphics are subject to copyright and other intellectual property laws.  
Copyright 2024 STODIA GmbH.

**Image sources** Symbols for warnings, prohibitions, mandatory actions and standards are taken from publicly accessible sources, such as the Internet. CAD product images and product photos are provided by the manufacturer. Images showing the product in use are provided with a reference to the source.

# Contents

<b>LEGAL NOTICE</b>	<b>2</b>
<b>CONTENTS</b>	<b>3</b>
<b>INTRODUCTION</b>	<b>4</b>
Preliminary information	4
Validity of the declaration of conformity	4
Manufacturer specifications	4
<b>SAFETY</b>	<b>5</b>
Warning levels	5
Important safety instructions	6
Intended use	7
Requirements for the target group	7
Duties of the operator	7
<b>PRODUCT DESCRIPTION</b>	<b>8</b>
Scope of delivery	8
Design	8
Symbols and connections	9
Wiring diagram	10
Technical data	11
<b>OPERATION</b>	<b>12</b>
Startup	12
Operation on the VAS 5581A diagnostic box	12
Operation on the VAS 5581 diagnostic box	14
Detaching the plug connections	16
Detaching the plug connection for the diagnostic cable (14-pin)	16
Cleaning	17
Storage	17
Disposal	17
Maintenance	17
<b>HELP</b>	<b>18</b>
Warranty	18
Customer service	18

## Preliminary information

Read through this operating manual carefully before using the product.

The product is delivered with a USB stick containing the operating manual in various languages. You can find the current version and additional languages on our homepage.

The operating manual is an essential part of the product and must be kept together with the product. If you sell or transfer ownership of the product, the operating manual must be handed over to the new operator.

In addition to this operating manual, you must observe all relevant regulations for diagnostics or troubleshooting of intrinsically safe high-voltage systems in road vehicles. This includes but is not limited to: instructions for the vehicle manufacturer's diagnostics systems, company-specific safety requirements and the state of the art for working with high-voltage systems.

## Validity of the declaration of conformity

The declaration of conformity applies to the product described in the operating manual. Any changes, modifications or extensions shall void the declaration of conformity and the risk assessment.

## Manufacturer specifications

Since its founding, our company has focused on groundbreaking solutions for electromobility. STODIA GmbH develops and produces custom solutions for the automotive industry, the energy storage sector, repair shops and special vehicle fleets.

Our core products are innovative energy storage systems, both stationary and mobile, which are essential technologies for advancing the energy revolution and energy autonomy. STODIA's portfolio also includes smart charging and battery technology, diagnostic systems, battery and cell management, and vehicle-wide measurement and diagnostic technology.

With experience in both software and hardware development, STODIA GmbH is your dependable partner at every production stage, from prototyping to series production – MADE IN GERMANY.

This safety chapter provides information about the following:

- The warning levels contained in this operating manual
- Important safety instructions for the product
- Intended use of the product
- Requirements for the target group
- Duties of the operator

This operating manual is only valid for the following product:

Item number      22103242  
Designation      Diagnostic cable VAS 5581/15

## Warning levels

This chapter provides information about the warning levels used in this operating manual.

### **DANGER**

Failure to observe the safety instructions **WILL** result in death or serious injury!

### **WARNING**

Failure to observe with the safety instructions **CAN** result in death or serious injury!

### **CAUTION**

Failure to observe the safety instructions **CAN** result in minor physical injury!

### **CAUTION**

Failure to observe the safety instructions can lead to damage to the product!

# Important safety instructions

This chapter contains the safety instructions that must be observed when handling the product.



## DANGER

### Danger of fatal electric shock!

The electrical voltage in other systems is lethal and will cause death by electric shock!

- Do not use the product for measurements on utility power circuits!
- Never attempt to power other devices with the product!



## WARNING

### Danger of fatal electric shock!

The electrical voltage in high-voltage systems is lethal and can cause death by electric shock!

Liquids, condensation and high humidity can cause short circuits!

- Do not let the product come into contact with liquids!
- Use the product only in dry and enclosed spaces!



## WARNING

### Danger of fatal electric shock!

The electrical voltage in the product is dangerous and can cause serious injury or death from electric shock!

Defective and damaged products cannot guarantee protection against electrical voltage!

- Do not let the product come into contact with chemicals!
- Replace a defective or damaged product immediately!
- Never attempt to repair or tamper with the product!

## Intended use

Use the product only in accordance with this operating manual; otherwise the electrical hazard protection provided by the product can no longer be guaranteed.

The product is used to adapt the VAS 5581/VAS 5581A diagnostic box to the vehicle-side plug connection specified by the vehicle manufacturer in the guided fault finding.

An additional VAS 5581/1A-2A adapter cable (ASE 409 049 00 000) is required for operation on the VAS 5581 diagnostic box.

The product may only be used on high-voltage systems that have been certifiably de-energized.

The product is suitable for testing the high-voltage battery in the following vehicles (not exhaustive):

- Volkswagen Golf 8 GTE
- Audi A3 TFSI e (8Y)

In this operating manual, vehicle manufacturers are exclusively defined as vehicle manufacturers in the Volkswagen Group.

Any use beyond what is listed here is prohibited.

## Requirements for the target group

Only qualified personnel may work with this product!

In this operating manual, qualified personnel is defined as personnel meeting all requirements for working on high-voltage systems applicable in the country of operation, as defined by:

- Regulations applicable in the country of operation
- Qualification according to DGUV 200-005 level 2 or higher, or equivalent
- Specifications from the vehicle manufacturer and/or the operator.

At all times while using the product, staff must wear the personal protective equipment prescribed by the vehicle manufacturer for work on high-voltage systems.

## Duties of the operator

The operator is responsible for ensuring that all staff working with the diagnostic cable fulfills the requirements for the target group.

Furthermore, the operator is responsible for ensuring the following:

- The diagnostic cable is always in perfect working order.
- The regular inspection intervals for the diagnostic cable are observed and recorded.

## Scope of delivery

Immediately check the condition of the product and the completeness of the delivery. If anything is missing or defective, please contact the manufacturer immediately.



- (1) Diagnostic cable
- (2) USB stick with operating manual

## Design

Product design:











- (1) Plug for battery management system
- (2) Plug for diagnostic box
- (3) Ground clip




## Symbols and connections

The following symbols are shown on the product:

Symbol	Meaning
 <p><b>Attention:</b> Check VAS-number to use suitable adapter cable.</p>	<p><b>Caution:</b> Check the VAS number to ensure that you are using a suitable adapter cable.</p>
	<p>Observe the operating manual!</p>
	<p>The serial number is used in conjunction with the manufacturer part number to identify the product.</p>
	<p>The manufacturer part number is used in conjunction with the serial number to identify the product.</p>
	<p>The disposal instructions prohibit disposal of the product with household waste. Always dispose of the product in accordance with all local disposal regulations.</p>
	<p>The CE marking certifies that the product complies with all applicable European regulations and has been subjected to the prescribed conformity assessment procedure.</p>
	<p>This label certifies that the product complies with the limits of GB/T 26572-2011 ("China-ROHS").</p>
	<p>The test seal identifies the product as having been approved for use in workshops and production facilities belonging to the vehicle manufacturer.</p>

# Wiring diagram

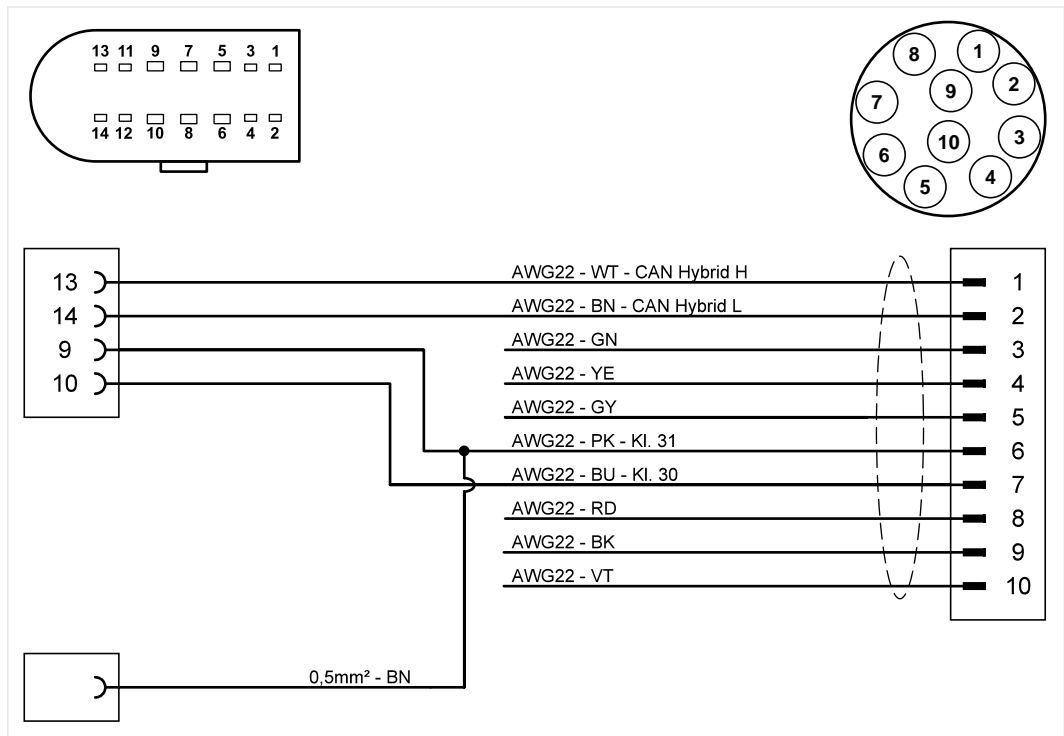

## Technical data

Rated data	Values
Manufacturer number	22103242
Maximum rated voltage	DC 14V
Maximum rated current	5A
Weight	~ 350g
Cable length	~ 2000mm/1450mm

Ambient conditions	Operation	Storage	Transportation
Temperature	5°C to 40°C	-20°C to 60°C	-20°C to 60°C
Elevation above sea level	Max. 2000m	No limitation.	
Humidity	Max. 80% up to 31°C, decreasing linearly to 50% at 40°C	Max. 85%	
	Condensation not permitted. Maximum permissible relative humidity: 60% in environments with corrosive gas/air.		

This chapter provides information about the following activities:

- Startup
- Detaching the plug connection
- Cleaning
- Storage
- Disposal
- Maintenance



## WARNING

### Danger of fatal electric shock!

The electrical voltage in high-voltage systems is lethal and can cause death by electric shock!

- Use the product only for the applications intended by the vehicle manufacturer!



## CAUTION

### Risk of damage!

Plug connections lock into place when attached.

- Unlock the plug connections before you detach them! (See chapter “Detaching the plug connections”)


## Startup

### Operation on the VAS 5581A diagnostic box


1. Observe the safety instructions.



2. Connect the ground clip to a conductive part of the vehicle body.
3. Connect the plug to the disconnected socket on the battery management system. Make sure that the plug connection engages.

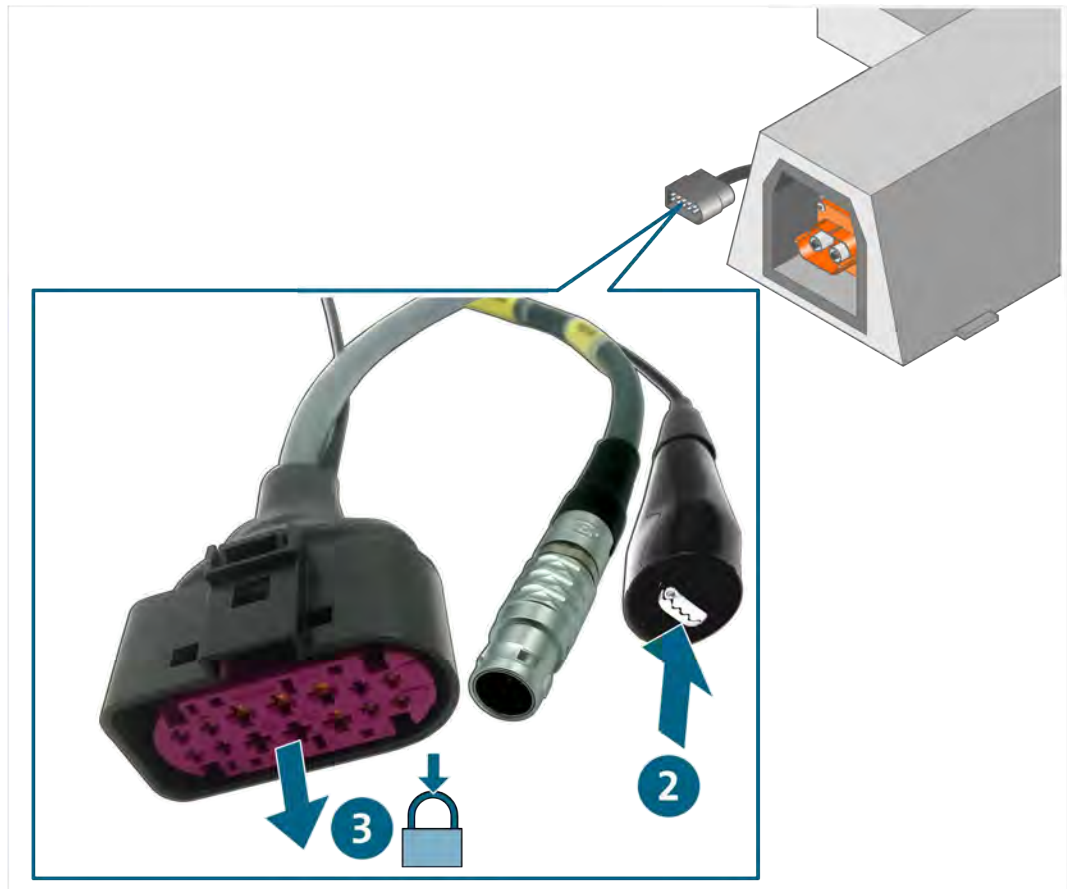

4. Connect the plug to the diagnostic box.

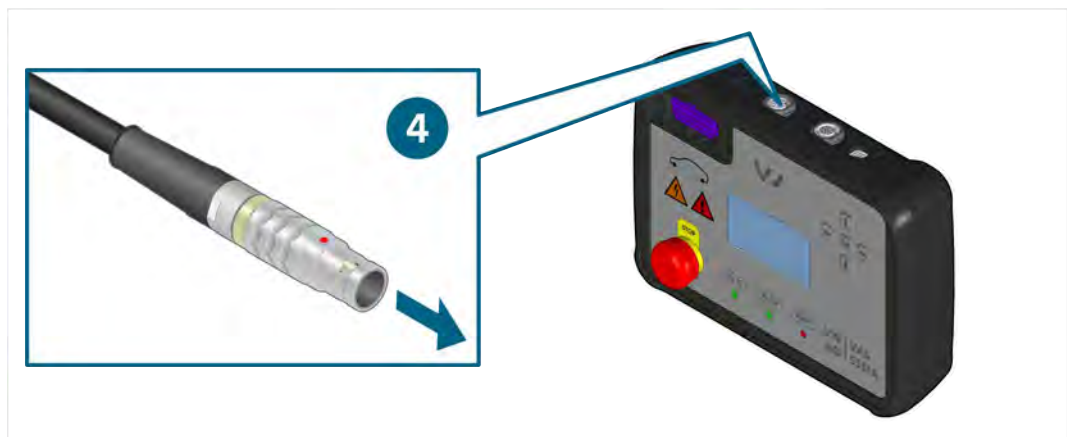

- ✓ You can now perform measurements in accordance with the guided fault finding.

## Operation on the VAS 5581 diagnostic box




For startup, the VAS 5581/1A-2A adapter cable (ASE 409 049 00 000) is also required. See the accompanying operating manual for instructions regarding startup of the VAS 5581/1A-2 adapter cable.


1. Observe the safety instructions.




2. Connect the ground clip of the VAS 5581/1A-2A adapter cable to a conductive part of the vehicle body.
3. Connect the plug of the VAS 5581/1A-2A adapter cable to the VAS 5581 diagnostic box.

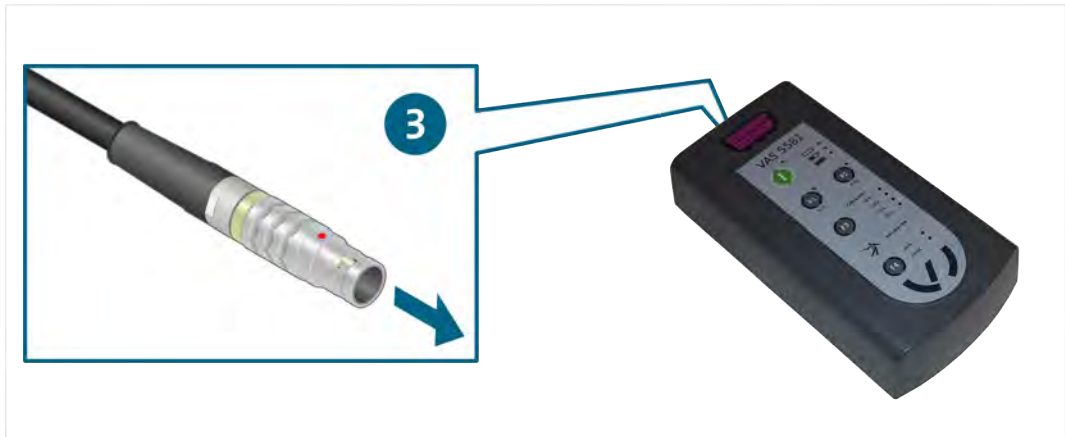

4. Connect the ground clip to a conductive part of the vehicle body.
5. Connect the plug to the disconnected socket on the battery management system. Make sure that the plug connection engages.

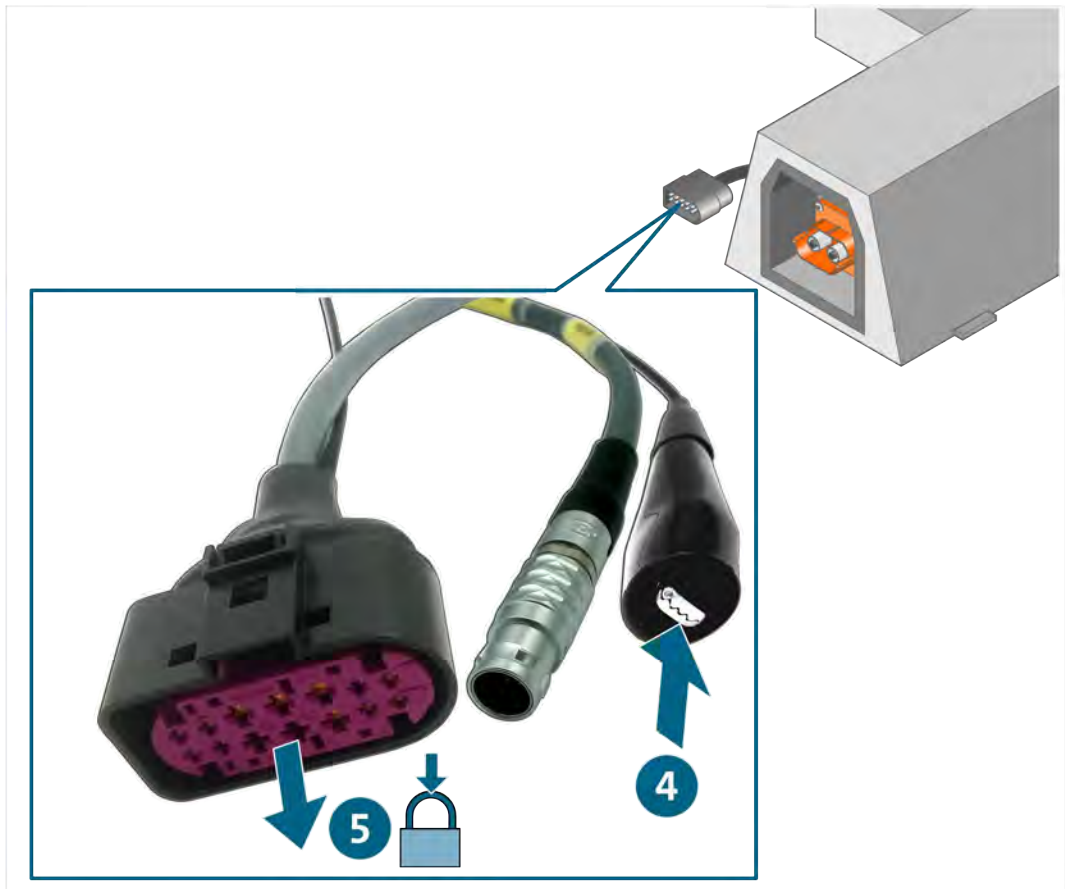

6. Connect the plug to the socket of the VAS 5581/1A-2 adapter cable.

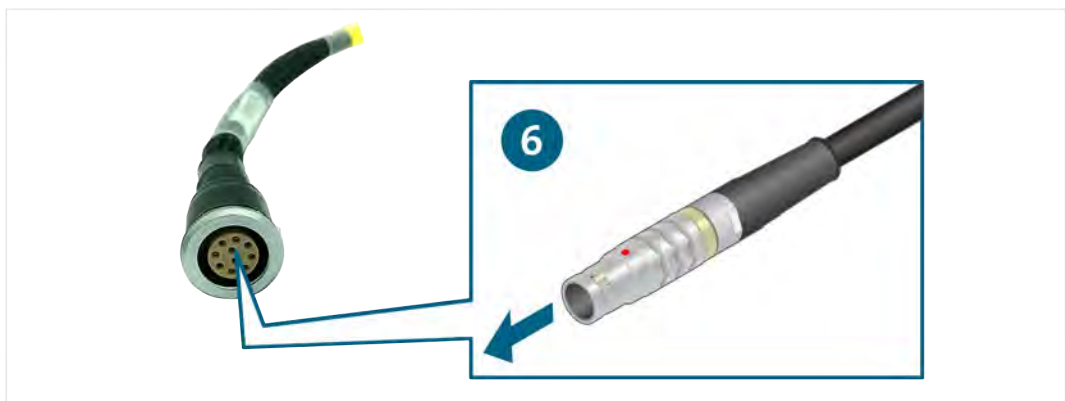

- ✓ You can now perform measurements in accordance with the guided fault finding.

## Detaching the plug connections



### WARNING

#### Risk of explosion!

Product components may produce sparks and electric arcs.

- Do not use the product in potentially explosive atmospheres!

### Detaching the plug connection for the diagnostic cable (14-pin)

The plug connections have an automatic locking mechanism. To detach a plug connection:

1. Push in and hold the catch.
2. Pull the plug connection apart.



- ✓ The plug connection is now detached.



## Cleaning



### **DANGER**

#### **Danger of fatal electric shock!**

The electrical voltage in high-voltage systems is lethal and will cause death by electric shock!

- Disconnect the product from all power sources before cleaning the product!

Observe the safety instructions!

Use only a dry cloth to clean the product.

## Storage

Store the product in a dry and dust-free location when not in use.

## Disposal

Observe the safety instructions!

Always dispose of the product in accordance with all local disposal regulations.

## Maintenance

Observe the safety instructions!

National and local requirements for regular testing must be observed!

Test the product for proper function at intervals of no more than 24 months.

Contact the manufacturer to have a professional function test performed.

## Warranty

STODIA GmbH grants a warranty period of 24 months from the date of purchase. The warranty is valid for demonstrable defects in functional material and workmanship.

Further information on the warranty conditions can be found in the terms and conditions on the manufacturer's website.

## Customer service

Always include the item number and, if available, the serial number with any product queries. Both numbers are found on the product.

STODIA GmbH  
Battery and Diagnostics Technology  
Im Freitagsmoor 45  
38518 Gifhorn, Germany

Phone: +49 (0) 5371 / 945 93 96-0

[service@stodia.de](mailto:service@stodia.de)

[www.stodia.de](http://www.stodia.de)

Volkswagen Aktiengesellschaft  
Group After Sales – Group Service  
Literature and Systems  
Repair Shop Equipment  
PO box 011/4915  
38442 Wolfsburg, Germany

For internal use only  
Subject to technical changes  
Version 01/2024